

22-40 CFM Hydraulic Driven Reciprocating

22 CFM @ 150 PSI
40 CFM @ 150 PSI


Basic Features

- Heavy duty 2 stage solid cast iron pump
- Disk & spring valves
- Bearings on both ends of the crank shaft
- Needle bearings and inserts on rods
- Industrial grade hydraulic drive motor
- Direct driven
- All UL electrical controls
- Access to compressor valves without head removal
- Standard steel cover
- Auto start stop or Pilot valve operation
- Centrifugal unloader
- Heavy duty air filters
- Swedish steel valves
- Torrington needle bearings
- 12 Volt controls



Elite Features

- All basic features
- Air/Oil Cooler
- Aluminum diamond plate cover
- Vibration isolation pads
- Freight pre-paid in the 48 states & southern Canada

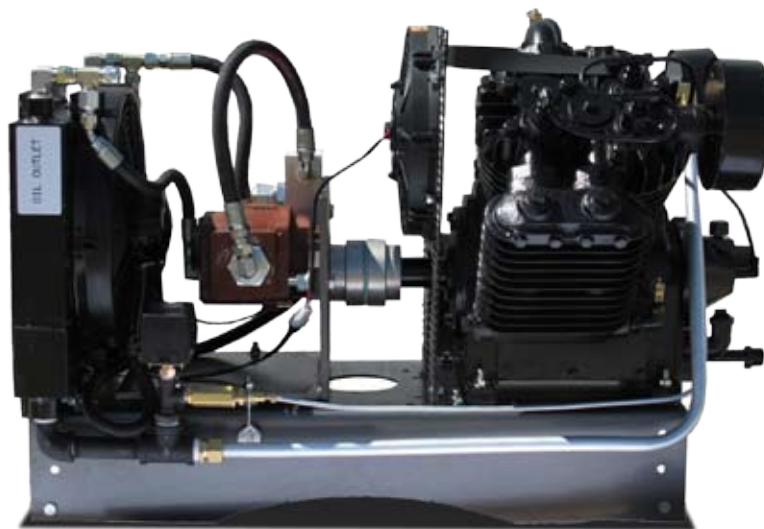

Model	CFM	PSI	Elite/Basic	Length	Width	Height	GPM	PSI
H-BM22	22	150	Basic	32	16	24	7	2850
H-BM22-E	22	150	Elite	32	16	24	7	2850
H-BM40	40	150	Basic	32	22	26	10	2850
H-BM40-E	40	150	Elite	32	22	26	10	2850

No Start Up Kit Required



Compressed Air Systems

Simplicity. It's What We Do

www.compressed-air-systems.com

